

# LUBRA-GLIDE "CE" CO-POLYMER BEADS®

THE ONLY BEAD MADE EXCLUSIVELY FOR THE PETROLEUM INDUSTRY.

## Advantages

- ◆ Reduces torque and drag
- ◆ Reduces casing wear
- ◆ Is non-abrasive
- ◆ Is recoverable using Sun's patented process
- ◆ Is thermally stable up to 500°F
- ◆ Is compatible with both oil and water base mud
- ◆ Is environmentally safe
- ◆ Resistance to deformation is greater than 25,000 psi hydrostatic, thermally stable down hole to 500°F in a drilling environment

## Physical Properties

- ◆ Form: Spherical Solid Bead
- ◆ Color: Clear
- ◆ Specific gravity: 1.06

## Application


- ◆ Concentrations of 2 – 8 ppb ( $5.71 - 22.87 \text{ Kg/m}^3$ ) will be sufficient to control torque and drag
- ◆ Concentrations of 8 – 12 ppb ( $22.87 - 34.31 \text{ Kg/m}^3$ ) will be sufficient for spotting in wire-line operations and running casing
- ◆ LUBRA-GLIDE "CE" CO-POLYMER BEADS® (coarse and fine) should mix through the mud-mixing hopper

## Packaging

- ◆ LUBRA-GLIDE "CE" CO-POLYMER BEADS® is available in 50 lbs (22.6 Kg) sacks, 48 or 50 sacks per pallet

## Typical Uses for LUBRA-GLIDE "CE" CO-POLYMER BEADS®

- ◆ Spot prior to running casing or liners
- ◆ Spot prior to logging operations
- ◆ Spot while drilling to transfer more true weight to bit
- ◆ Spot in key seats to reduce torque, drag, and sticking problems
- ◆ Apply LUBRA-GLIDE "CE" CO-POLYMER BEADS® Fine Beads for torque and drag reduction in coil tubing operations or with work strings
- ◆ Lubricant for OBM or SBM
- ◆ Reduces risk of differential sticking
- ◆ Aids in directional changes or while sliding

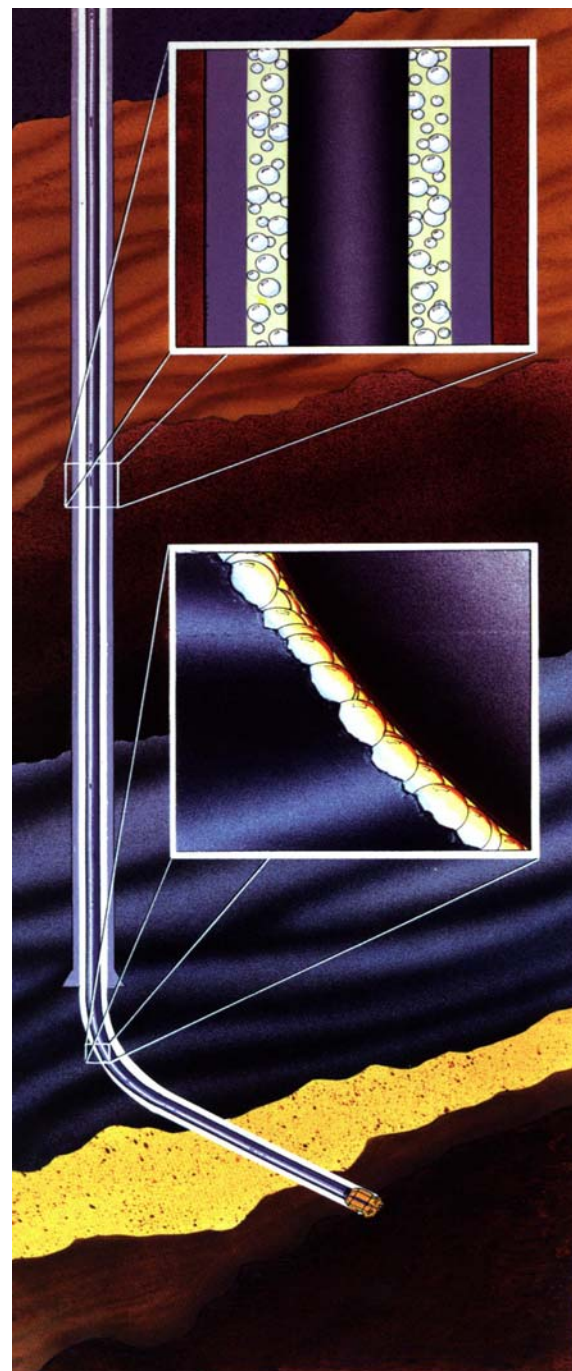

*Sun ... The HOLE Solution Company*

**1-800-962-6490**

[www.sundrilling.com](http://www.sundrilling.com)  
[solutions@sundrilling.com](mailto:solutions@sundrilling.com)